NOTES:


- 1. REFER TO STANDARD SPECIFICATIONS FOR CONSTRUCTING AND REPAIRING PRIVATE SEWER CONNECTIONS FOR FURTHER INFORMATION AND DETAILS. IF THERE ARE CONFLICTS BETWEEN THE SPECIFICATION AND STANDARD PLATE, THE STANDARD PLATE GOVERNS.
- THIS PLATE IS FOR USE REGARDING ABANDONMENT OF PRIVATE SANITARY OR STORM SEWER SERVICES VIA EXCAVATION IN STREET RIGHT-OF-WAY OR EASEMENT.
- 3. CONTRACTOR TO SUBMIT A AND B TO CITY TWO WEEKS BEFORE CONSTRUCTION, AND C POST CONSTRUCTION:
 - A. WORK PLAN AND SCHEDULE.
 - B. MATERIAL SHOP DRAWINGS AND SPECIFICATIONS.
 - C. POST—CONSTRUCTION PHOTOS SHOWING ALL PIPE, BULKHEADS, AND CONNECTIONS.
- 4. AT MINIMUM, PLACE AND COMPACT GRANULAR PIPE BEDDING TO A POINT AT LEAST 12" ABOVE ABANDONED PIPE.

- 5. COMMERCIAL PROPERTIES:
 - BULKHEAD SERVICES AT MAINLINE SEWER PIPE AND ALSO WITHIN 4 FEET OF PROPERTY LINE.


RESIDENTIAL PROPERTIES:

BULKHEAD SERVICES AT MAINLINE SEWER PIPE.

 IF CLAY WYE STUB TO THE BASE OF THE MAINLINE PIPE IS DAMAGED, CUT IT FLUSH AND INSTALL APPROVED FLANGED SADDLE CONNECTION WITH STAINLESS STEEL CLAMP AND ABANDON SERVICE STUB.

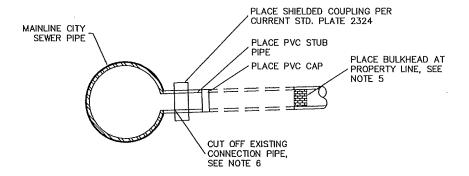

<u> PRIVATE SEWER CONNECTION ABANDONMENT BY EXCAVATION — FOR PRIVATE PIPE LESS THAN 12" Ø</u>

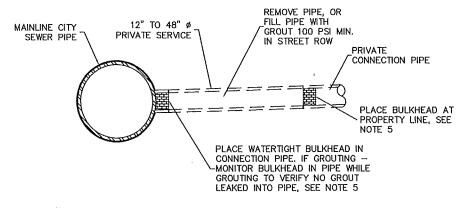

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Minnapota

lavon D.

Date 05-10-2024 Ltc. No. 26424

PRIVATE SEWER CONNECTION ABANDONMENT BY EXCAVATION - FOR PIPES 12" - 48" ϕ

 CITY OF ST. PAUL DEPARTMENT OF PUBLIC WORKS

PRIVATE SEWER CONNECTION ABANDONMENT (BY EXCAVATION)

Date of S Revision MAY

2024

Standard Plate No.