



NOTES:

1. REFER TO STANDARD SPECIFICATIONS FOR CONSTRUCTING AND REPAIRING PRIVATE SEWER CONNECTIONS FOR FURTHER INFORMATION AND DETAILS. IF THERE ARE CONFLICTS BETWEEN THE SPECIFICATION AND STANDARD PLATE, THE STANDARD PLATE GOVERNS.
2. THIS PLATE IS FOR USE REGARDING ABANDONMENT OF PRIVATE SANITARY OR STORM SEWER SERVICES VIA EXCAVATION IN STREET RIGHT-OF-WAY OR EASEMENT.
3. CONTRACTOR TO SUBMIT TO PW-SEWERCOUNTER@CI.STPAUL.MN.US:
 - A. WORK PLAN AND SCHEDULE. WORK PLAN TO INCLUDE FIELD MEASURE PIPE DIAMETER(S). TWO WEEKS BEFORE CONSTRUCTION.
 - B. MATERIAL SHOP DRAWINGS AND SPECIFICATIONS TWO WEEKS BEFORE CONSTRUCTION
 - C. POST-CONSTRUCTION PHOTOS SHOWING ALL PIPE, BULKHEADS, AND CONNECTIONS WITHIN 1-WEEK POST-CONSTRUCTION

4. AT MINIMUM, PLACE AND COMPACT GRANULAR PIPE BEDDING TO A POINT AT LEAST 12" ABOVE ABANDONED PIPE.
5. COMMERCIAL PROPERTIES:
BULKHEAD SERVICES AT MAINLINE SEWER PIPE AND ALSO WITHIN 4 FEET OF PROPERTY LINE.
- RESIDENTIAL PROPERTIES:
BULKHEAD SERVICES AT MAINLINE SEWER PIPE.
6. IF CLAY WYE STUB TO THE BASE OF THE MAINLINE PIPE IS DAMAGED, CUT IT FLUSH AND INSTALL APPROVED FLANGED SADDLE CONNECTION WITH STAINLESS STEEL CLAMP AND ABANDON SERVICE STUB.

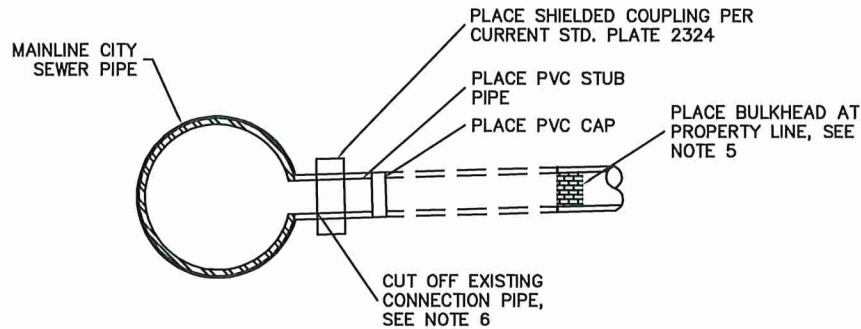

PRIVATE SEWER CONNECTION ABANDONMENT BY EXCAVATION – FOR PRIVATE PIPE LESS THAN 12" ø

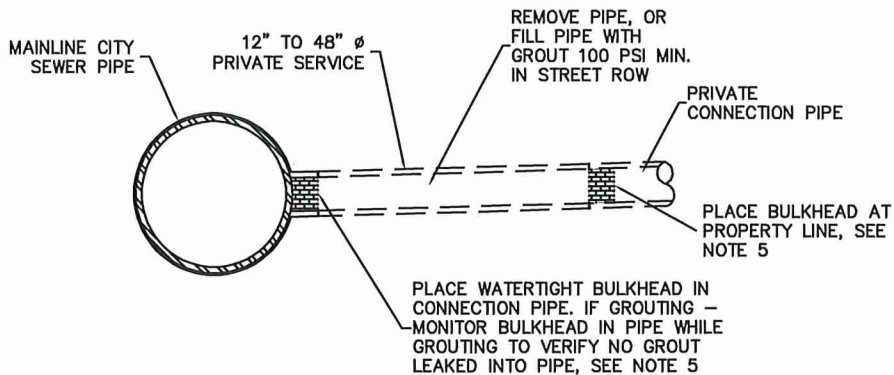

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Minnesota

Aaron D. Hass
AARON D. HASS

Date 02-11-2025 Lic. No. 26424

PRIVATE SEWER CONNECTION ABANDONMENT BY EXCAVATION – FOR PIPES 12" – 48" ø

APPROVED _____
Nickel 3/21/25
CITY ENGINEER

CITY OF ST. PAUL
DEPARTMENT OF PUBLIC WORKS
PRIVATE SEWER CONNECTION ABANDONMENT
(BY EXCAVATION)

Date of Revision
FEB 2025

Standard Plate No.
2704A